

Mirrors are provided with mirror clips and wood screws. Attach one mirror clip at each corner approximately 2" in from the vertical edge.


Eyeball light fixtures are provided with a 2' cord. Electrician should cut hole for cord and provide the power supply. Bulb is 40w - reflector type.

Cabinets should be attached to wood framed walls by screwing through the interior back panel into wall studs or blocking. Fasteners for wood framed walls are provided. The fasteners for other wall types are not provided.


Adjacent cabinets and components should be assembled by fastening through the interior panels with the screws or bolts provided. Tighten securely.

Purse shelves should be attached by screwing through the back and/or end into the cabinet and/or wall with the screws and/or bolts provided.

Cabinets are marked for ease of assembly. Match up like markings for both vertical and horizontal sections. Markings will be on the backs or other surfaces that are inconspicuous after installation.

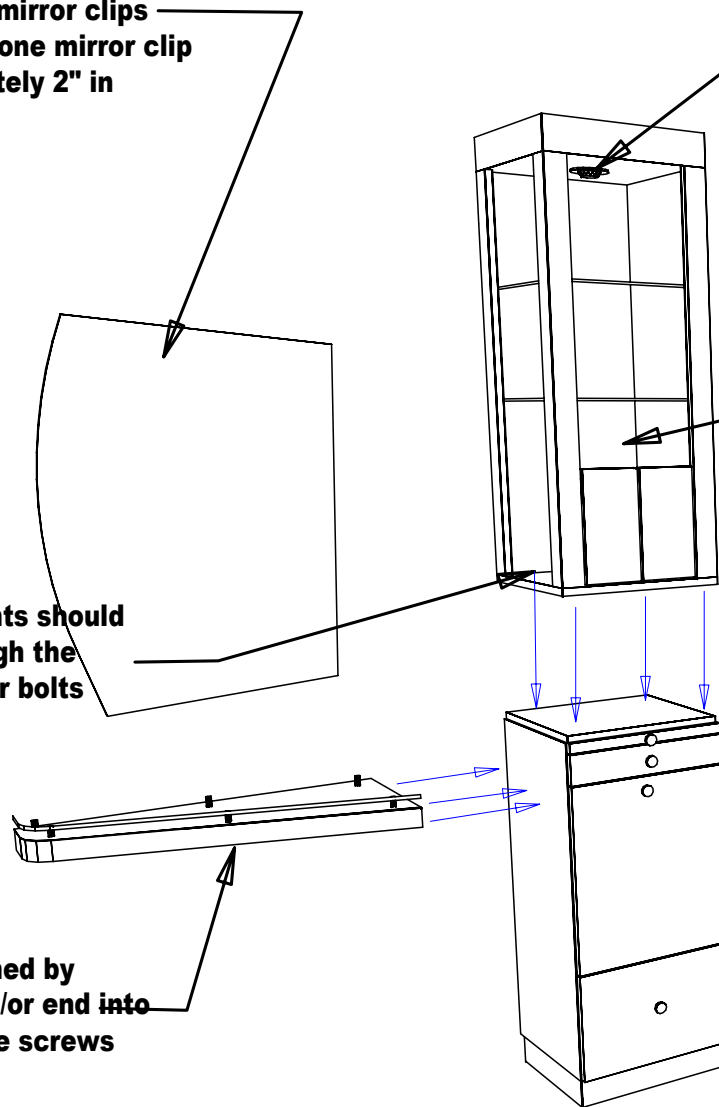

**#1, #2, & #3**

 <b>Collins Manufacturing</b> 2000 Bowser Rd. Cookeville TN 38506		
Title: <b>781-18 LEXINGTON TOWER STATION</b>		
Size:	#:	Drawn By:
Date:	Sheet #:	