





The base cainet should have come assembled □
 as above. □

Set the base cainet in desired final location. □

3. Hang both shelves from french cleat installed on □ either side of base cabinet. Be sure to center the □ shelves from left to right. (pictured below)





This drawing is the property of Collins Manufacturing Company and is protected under copyright law.

4. Remove top drawer on both sides by fully □ extending the drawer, and releasing from drawer □ track by pressing tabs on either side of drawer box. □


5. Set upper cabinets on top of lower cabinets, flush on left and right and butting against back filler panel.


(bottom left)□

6. Insert provided bolts up from base cabinet \square through pre-drilled holes into threaded inserts in the \square bottom of the upper cabinets. \square

(bottom right)□

7. Re-insert drawer boxes to base cabinets.





Preliminary
Not For Construction

Quantity -

Finish Schedule

Face Color -

Top Color -

Toe Color -

Pulls -

Interior -


Other (Specify)


Installation Notes:

- 1. All hardware needed for assembly is included.
- 2. Large items are preassembled at the factory to ensure proper alignment. Items are then disassembled into managable sections for shipping purposes and ease of reassembly.
- 3. Shipping cleats need to be removed before installation. These cleats are installed to prevent damage.




- 8. Set mirror frames on top of □ each shelf on either side and □ center it left to right. (as below)□
- 9. Using provided 1 1/4" wood □ screws and beauty washers, □ secure frame through screw □ cleats (as seen to the right) into □ cabinets.







This drawing is the property of Collins Manufacturing Company and is protected under copyright law. 10. Using provided mirror "J" □ clips and 5/8" flat head screws, □ mount mirrors to both sides of □ cabinet on mirror frames. □

NOTE: It is very important to □ complete this step before □ installing the top soffit!





Preliminary
Not For Construction



Quantity -

Finish Schedule

Face Color -

Top Color -

Toe Color -

Pulls -

Interior -

Other (Specify)


Installation Notes:

- 1. All hardware needed for assembly is included.
- 2. Large items are preassembled at the factory to ensure proper alignment. Items are then disassembled into managable sections for shipping purposes and ease of reassembly.
- 3. Shipping cleats need to be removed before installation. These cleats are installed to prevent damage.







12. Secure in place using □ provided fasteners, being □ sure not to drive the □ fasteners into the finished □ insides of the upper □ cabinets.




- 13. Set adjustable glass shelf pins in \square desired pin hole locations. \square
- 14. Insall adjustable glass shelves by \Box setting them on the pins.






Preliminary Not For Construction

This drawing is the property of Collins Manufacturing Company and is protected under copyright law.

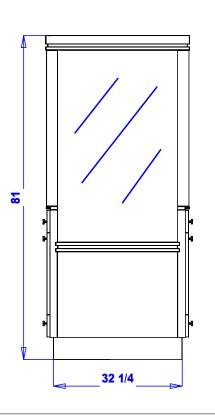

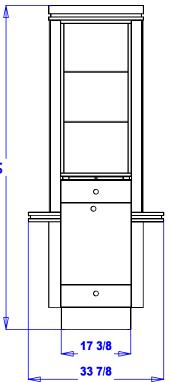

Quantity -

Finish Schedule

Face Color -

Top Color -

Toe Color -

Pulls -

Interior -


Other (Specify) -

Installation Notes:

- 1. All hardware needed for assembly is included.
- 2. Large items are preassembled at the factory to ensure proper alignment. Items are then disassembled into managable sections for shipping purposes and ease of reassembly.
- 3. Shipping cleats need to be removed before installation. These cleats are installed to prevent damage.




Electrical Specs for 411-36 & 412-36




Power could come from the ceiling or the floor into the chase.

Drill hole in back of lower cabinet for power strip cord to plug into power outlet in chase.

WIRE CHASE

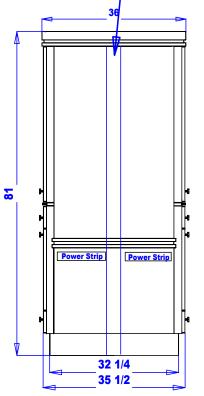

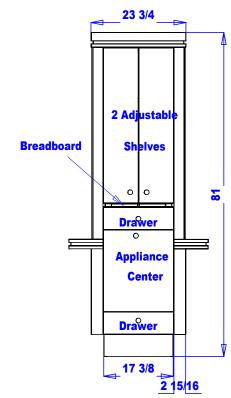

Quantity -

Finish Schedule

Face Color -

Top Color -

Toe Color -

Pulls -

Interior -

Other (Specify) -

Installation Notes:

- 1. All hardware needed for assembly is included.
- 2. Large items are preassembled at the factory to ensure proper alignment. Items are then disassembled into managable sections for shipping purposes and ease of reassembly.
- 3. Shipping cleats need to be removed before installation. These cleats are installed to prevent damage.

Preliminary Not For Construction

This drawing is the property of Collins

Manufacturing Company and is protected
under copyright law.

